

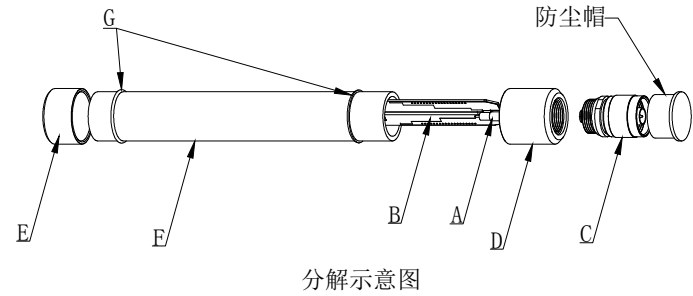


REV.	ECN NUMBER	DESCRIPTION	DATE	DRAWN	CHECKED	APPROVED
X1	ECN231366	REASE FOR PRODUCTION	05/22' 23	刘晓峰	丁第斌	牛宝星

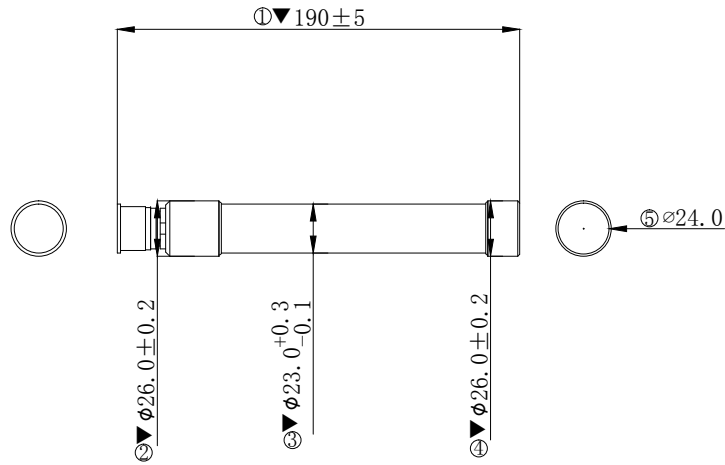

分解示意图

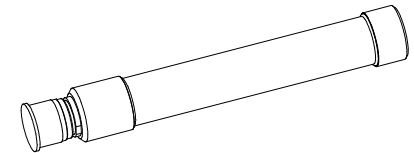

3D示意图

NOTES:

1. NO OBVIOUS INDENTATION, NO BURR, SCRATCHES, DEFORMATION AND OTHER BAD.
2. SALT SPRAY:48H.
3. VSWR TEST:600-960MHz≤3.5, 1710-2690MHz≤3.5
3300-5000MHz≤3.5.
4. MARK "⊕" WAS FAI DIMENSIONS.
5. MARK "▼" WAS CRITICAL DIMENSIONS.
6. HSF SHALL CONFORM TO THE STANDARD QE-Q-19-001 ENVIRONMENTAL HAZARDOUS SUBSTANCES MANAGEMENT.

G	胶水	1	AB胶, NO. 660-4, 50ML/支, 华麟电子
F	玻璃钢管	1	玻璃钢管, 白色, OD23*158mm
E	顶帽	1	顶帽, 15*OD26mm, 接OD23mm玻璃钢, 48H盐雾
D	铝管固定件	1	铝管固定件, OD26*25mm, 接OD23mm玻璃钢, 48H盐雾
C	N头连接器	1	N公头公针, FOR RG141, 主体黄铜镀镍, 中心针镀金, 48H盐雾
B	PCB	1	PCB_FR4双面板_绿油_121.6*18.1*T1.0mm
A	CABLE	1	RG141/50欧姆, 镀银铜线, 蓝色表皮, L=44MM
ITEM	PART NAME	Q' TY	MATERIAL / FINISH

	GENERAL TOLERANCE		SCALE: 1:1	DRAWN: 刘晓峰	DATE: 05/22' 23	DWG. NO: 600-V371-01	TITLE: ANT_EX_0650_HG26*190mm_N-J	REV. X1
	X±0.20	X.°±1°	UNIT: mm	CHECK:	DATE:	PARTS NO. (INTENDED USE): 81800V371	Customer Figure	SHEET: 1/1
	.XX±0.10	XX.°±1°	SIZE: A4	APPROVE:	DATE:			