


REV.	ECN NUMBER	DESCRIPTION	DATE	DRAWN	CHECKED	APPROVED
A	ECN212660	正式发行	11/25' 21	梁兑泉	丁第斌	牛宝星

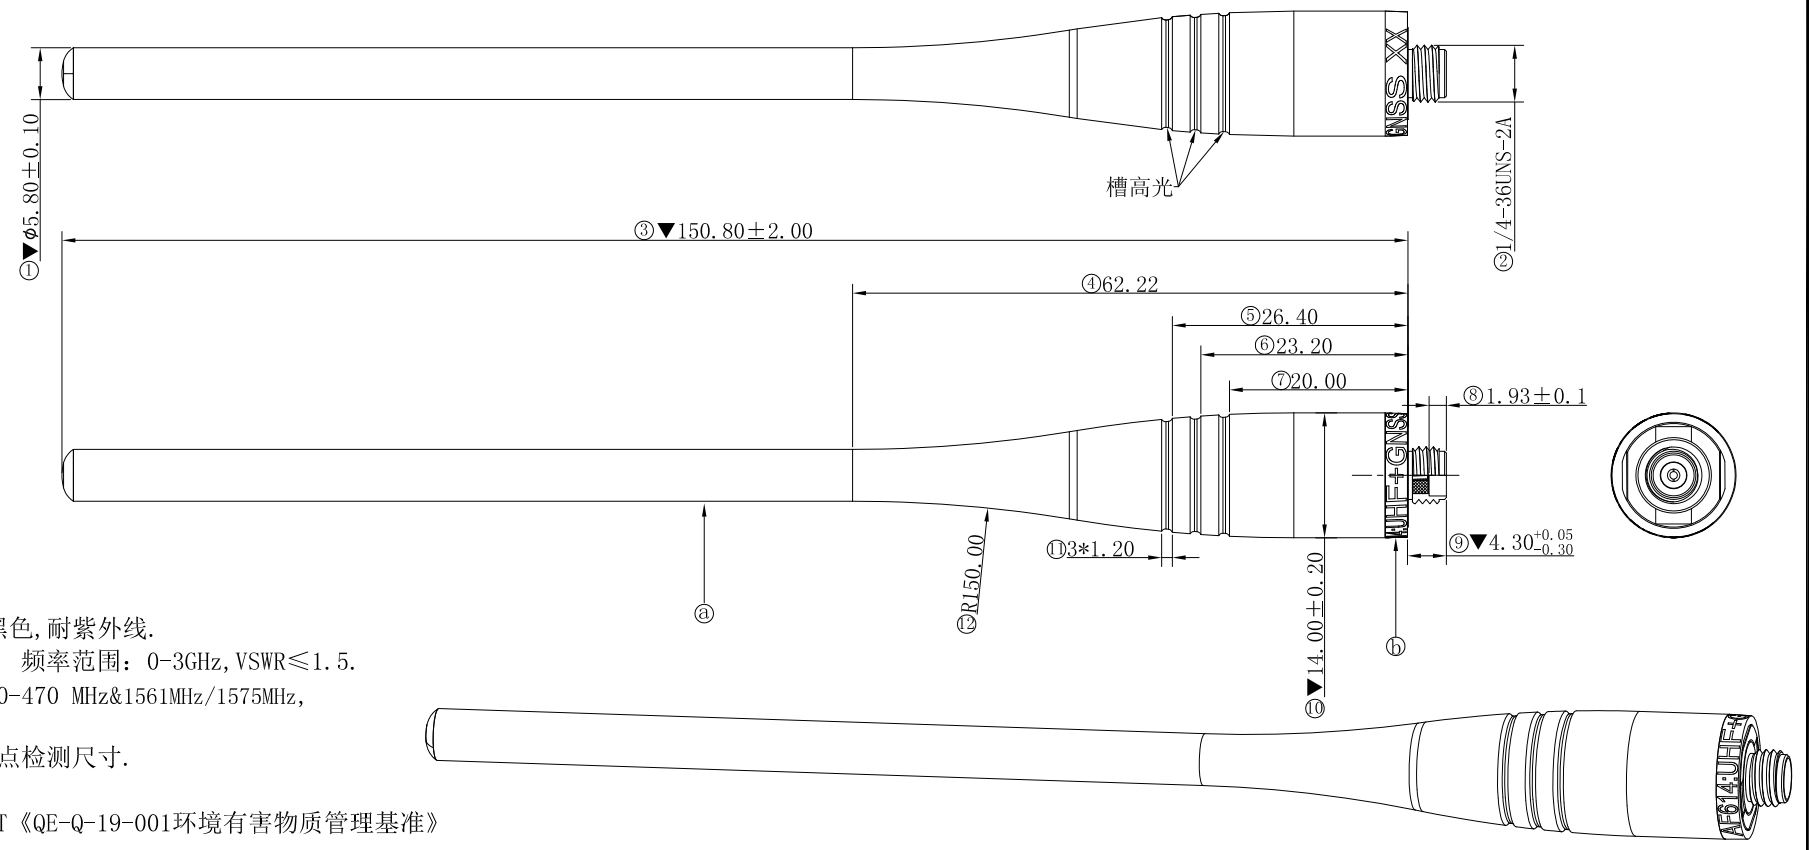

- 备注:
1. 材质:
塑胶壳: TPU, 黑色, 耐紫外线.
SMA连接器, 镀镍, 频率范围: 0-3GHz, VSWR≤1.5.
 2. 天线频率范围: 400-470 MHz&1561MHz/1575MHz, VSWR≤2.7.
 3. 标有“▼”为QC重点检测尺寸.
 4. 盐雾48H.
 5. 有害物质须符合ECT《QE-Q-19-001环境有害物质管理基准》管控标准.

- NOTE:
1. Material:
Plastic shell, TPU, black, resistance to ultraviolet light.
SMA connector, nickel plating, frequency range: 0-3 GHz, VSWR 1.5 or less.
 2. The antenna frequency range: 400-470 MHz&1561MHz/1575MHz, VSWR≤2.7.
 3. Marked "▼" key size detection for QC.
 4. Salt fog 48 h.
 5. HSF shall conform to the standard QE-Q-19-001 Environmental Hazardous Substances Management.

镭雕字符说明

AF614: UHF + GNSS XX **AF614: UHF + GNSS XX** PC蓝色色环配件

镭雕字符

产品型号 产品生产年份后两位, 例: 2021生产的镭雕21.

字符字体: Tahoma, 字符高度: T=2.20mm, 字符朝向: 字体顶部与配件进胶口&倒角面平行.

b	配件	1	DH6-胶杆天线, 直径14.0*2.5mm_PC蓝色色环配件
a	半成品2	1	DH6-胶杆天线, 带件注塑TPU, 黑色直径14*150.8mm-TPU半成品
ITEM	PART NAME	Q' TY	MATERIAL / FINISH

	GENERAL TOLERANCE		SCALE: 1:1	DRAWN: 梁兑泉	DATE: 11/25' 21	DWG. NO: 600-U931-01	TITLE: ANT_EX_GPS_400-470MHz+TPU+shell_DH6	REV. A
	.X±0.30	X.°±1°	UNIT: mm	CHECK:	DATE:	PARTS NO. (INTENDED USE): 81800U931		SHEET: 1/1
	.XX±0.10	XX.°±1°	SIZE: A4	APPROVE:	DATE:			