

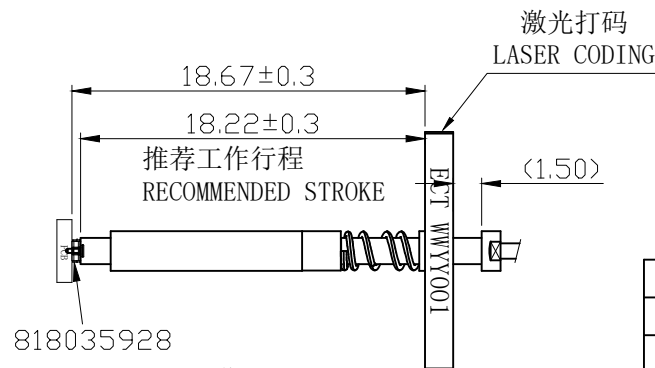
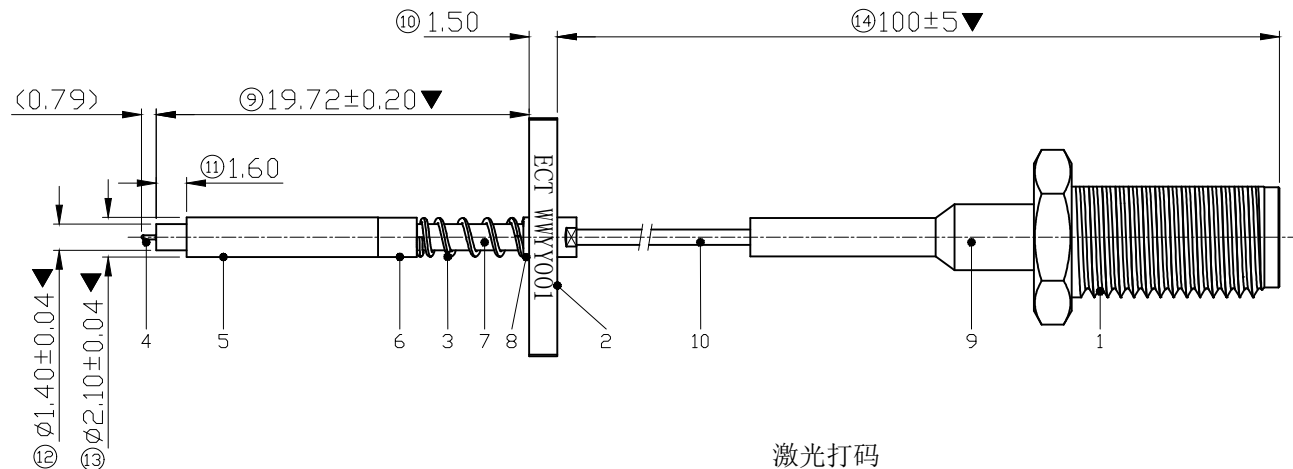


文档密级:
商业秘密

REV.	ECN NUMBER	DESCRIPTION	DATE	DRAWN	CHECKED	APPROVED
X1	ECN236831	FIRST EDITION	02/24/23	Weijie	Martin	ken
X2	ECN236831	调整尺寸 CHANGE SIZE	05/07/24	Weijie	Martin	ken

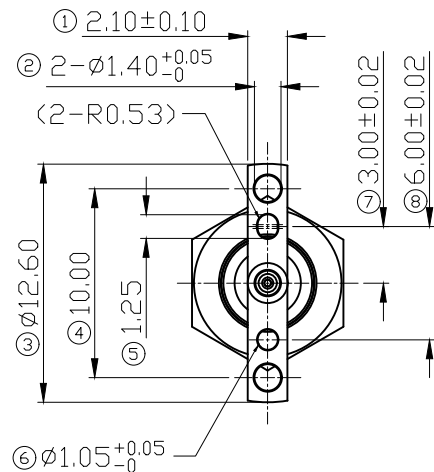

工作状态
WORKING CONDITION



3D VIEW

10	CABLE	白色 WHITE
9	热缩套管 HEATSHINK SLEEVE	黑色 BLACK
8	绝缘子 INSULATOR	白色 WHITE
7	主体 ONTOLOGY	钝化 PASSIVATION
6	焊杯 WELDING CUP	镀金 GOLD PLATED
5	外导体 OUTER CONDUCTOR	镀金 GOLD PLATED
4	中心针 CENTER PIN	镀金 GOLD PLATED
3	弹簧SPRING	钝化 PASSIVATION
2	法兰FLANGE	镀镍 NICKEL PLATING
1	SMA	镀金 GOLD PLATED
NO.	DESCRIBE	FINISH

技术参数 TECHNICAL PARAMETER :

1. 电气特性 ELECTRICAL CHARACTERISTICS

特性阻抗 CHARACTERISTIC IMPEDANCE: 50 Ω ;

频率范围 FREQUENCY RANGE : DC-9 GHz;

电压驻波比 V. S. W. R: <1.4@DC-3GHZ;<1.6@3-6GHZ;<1.8@6-9GHZ;

插入损耗 INSERTIOLOSS:1.5MAX@DC-3GHZ;2.0MAX@3-6GHZ;2.8MAX@6-9GHZ;

耐压 WITHSTANDING VOLTAGE: > 300 V AC/1MIN;

2. 机械特性 MECHANICAL PROPERTIES ;

耐久性 DURABILITY: > 10000 CYCLES;

3. 环境特性 ENVIRONMENTAL CHARACTERISTICS ;

工作温度范围 RANGE OF WORKING TEMPERATURE:-40 $^{\circ}$ C~+85 $^{\circ}$ C;

湿度范围 HUMIDITY RANGE : 15%~85%;

有害物质需符合ECT《QE-Q-19-001环境有害物质管理基准》管控标准。

HAZARDOUS SUBSTANCES SHALL COMPLY WITH ECT<QE-9-19-001

ENVIRONMENTAL HAZARDOUS SUBSTANCES MANAGEMENT BENCHMARK "CONTROL STANDARD IT.



GENERAL TOLERANCE	
XX.± 0.40	XX.°± 2°
X.± 0.25	X.°± 1°
.X± 0.15	.X°± 0.5°
.XX± 0.10	

SCALE:	1:1
UNIT:	mm
SIZE:	A4

DRAWN:	Weijie
CHECK:	
APPROVE:	

DATE:	05/07/24
DATE:	
DATE:	

DWG.NO:	600-40523-01
PARTS NO.(INTENDED USE):	818040523

TITLE:	MINI RF TEST ADAPTER 7GEN L100*W13*H2.1
--------	--

REV.	X2
SHEET:	1/1